


To change the batteries on the Carbon Monoxide Alarm:

1. Remove the detector from its mounting base by twisting the detector counterclockwise. Remove and dispose of the battery according to local regulations.
2. To ensure proper power-down sequence, wait a minimum of 20 seconds before installing new battery.
3. Install a new CR123-A 3V Lithium battery in the battery compartment. Follow the polarity diagram inside the compartment. If the battery is incorrectly inserted, remove it gently with a non-conductive tool and correctly reinsert.
4. Reinstall onto the mounting base by turning the detector clockwise.
5. After the power-up sequence the green LED should blink about once every 12 seconds to indicate normal operation. If the battery is not installed correctly, the detector will not operate and the battery may be damaged. If the detector does not power-up, check for a fully charged battery.

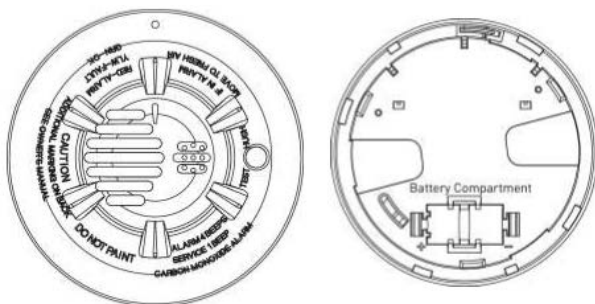

If you require assistance with any step of your battery installation please contact us at **1-866-476-0420**.